



Trash Pump

TP03



SPECIFICATIONS

ITEM	U.S.A.	METRIC
CAPACITY		3 in. Discharge
PERFORMANCE	450 gpm	1688 lpm
FLOW RANGE	7 - 9 gpm	26 - 34 lpm
PRESSURE	2000 psi	140 bar
PORTS	-12 and -14 SAE O-Ring	
WEIGHT	31 lbs	14 kg
LENGTH	14 in.	35.5 cm
CONNECTION	HTMA Flush Face Couplers	
DISCHARGE CONNECTION	3 in. Female Pipe Thread	
HOSE WHIPS	No	

Features and Benefits

The Stanley TP03 Trash Pump is the lightest, most efficient way to move large volumes of liquid with concentrations of solids up to 25% by volume.

No priming necessary, just drop it into the material and it's ready for work.

The urethane bowl is virtually indestructible - tough, lightweight, abrasion resistant, resilient and impervious to petrochemical solvents. The TP03 can pump almost anything without damaging the bowl.


The TP03's efficient design places the urethane impeller above material flow, reducing blockage, jamming and overall

pump wear while keeping liquids moving fast enough to pump high volumes of solids at a much higher head than non-submersible pumps.

For easy maintenance and inspection, simply remove the wing nuts and top plate, clean out the bowl and replace the cover and nuts. You're back to work in less than 5 minutes.

The TP03 can run dry without damaging motor or impeller, reducing the possibility of downtime.

It handles solids up to 3-inches at very high volumes to quickly and efficiently empty sumps, vaults, septic systems, trenches, etc.

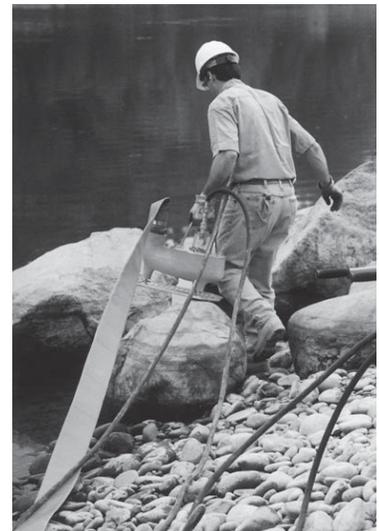

Distributed by
McCann Equipment Ltd.

Montreal: 10255 Cote De Liesse, Dorval, QC H9P 1A3
Tel.: 1-800-663-6344
Fax: (514) 636-0365

Toronto: 2178 Torquay Mews, Mississauga, ON L5N 2M6
Tel.: 1-800-287-5714
Fax: (905) 542-1335

ORDERING INFORMATION

MODEL/PART NO.	DESCRIPTION
TP0300301	3 in. Capacity, Urethane Bowl, CE

ACCESSORIES

PART NO.	DESCRIPTION
52720	Coupler, 3 in. Male NPT/3 in. Male Camlock

WARRANTY

Stanley Hydraulic Tools and their associated parts are warranted against defects in materials and workmanship for a period of twelve months from the date of purchase. Stanley Hydraulic Tools reserves the right to repair or replace only those parts which prove to have been defective at the time of purchase. This warranty becomes void if maximum flow and pressure ratings are exceeded.

All Stanley Hydraulic Tools, parts, accessories and allied equipment are subject to design improvements, specification and price changes at any time without notice and with no obligation to units already sold. Weights, dimensions and operating specifications listed herein are subject to change without notice. Where specifications are critical to your applications, please consult Stanley Hydraulic Tools.

STANLEY[®]

Distributed by
McCann Equipment Ltd.

Montreal: 10255 Cote De Liesse, Dorval, QC H9P 1A3
Tel.: 1-800-663-6344
Fax: (514) 636-0365

Toronto: 2178 Torquay Mews, Mississauga, ON L5N 2M6
Tel.: 1-800-287-5714
Fax: (905) 542-1335