



Pump
SM21



SPECIFICATIONS

ITEM	U.S.A.	METRIC
CAPACITY	2-1/2 in. Discharge	
PERFORMANCE	300 gpm	1135 lpm
FLOW RANGE	4 - 9 gpm	15 - 34 lpm
PRESSURE	1000 - 2000 psi	70 - 140 bar
PORTS	-6 SAE O-Ring	
WEIGHT	20 lbs	9.1 kg
LENGTH	16 in.	40.6 cm
WIDTH	6-1/4 in.	15.9 cm
CONNECTION	3/8 in. Flush-Face Quick Disconnect Coupler	
HOSE WHIPS	Yes	
MOTOR	Integral	
DISCHARGE SIZE	2-1/2 in. Female Pipe Threads	

Features and Benefits


The Stanley SM21 Water Pump is one of the lightest and most durable pumps available. It's capability of pumping 300 gpm (1135 lpm) at a 50 foot head make it ideal for vaults, manholes and more specifically in confined narrow openings.

The SM21 will outpump most all gasoline engine driven pumps. There is no recoil starting, priming or suction hose as with gas engine driven pumps. It can be run

dry without damage.

Submersed into the water and with its easy hookup to a power unit, the SM21 is instantly pumping.

The cast iron impeller of the SM21 is within 3/4 of an inch of the base allowing the pump to remove more liquids than other pumps. With only a few moving parts, the SM21 is virtually maintenance free.

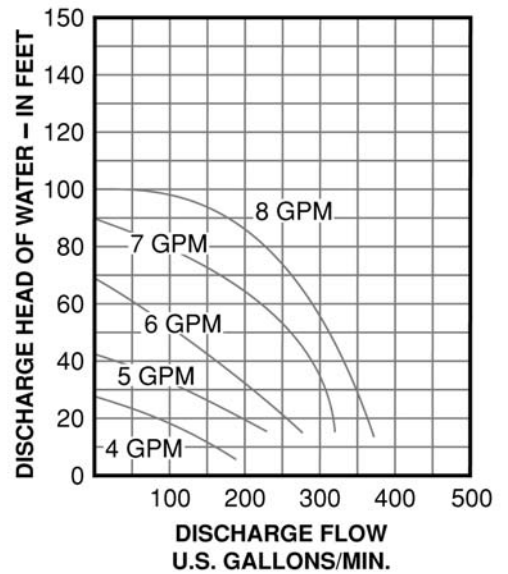

STANLEY
Distributed by
McCann Equipment Ltd.

Montreal: 10255 Cote De Liesse, Dorval, QC H9P 1A3
Tel.: 1-800-663-6344
Fax: (514) 636-0365

Toronto: 2178 Torquay Mews, Mississauga, ON L5N 2M6
Tel.: 1-800-287-5714
Fax: (905) 542-1335

ORDERING INFORMATION

MODEL	PART NO.	DESCRIPTION
SM21	SM2151101	8 gpm (30 lpm) CE, 2-1/2 in. Discharge

ACCESSORIES

PART NO.	DESCRIPTION
02183	Fire Hose, 25 ft x 2-1/2 in. Diameter
02317	Fire Nozzle, 1 in.
05133	Thread Adapter for Pump to fire Hose, 2-1/2 in.
05134	Fire Hose, 50 ft x 2-1/2 in. Diameter
05135	Spanner Wrench for Pin Lug Coupler
29884	2-1/2 in. Combination Nipple (NPT)

WARRANTY

Stanley Hydraulic Tools and their associated parts are warranted against defects in materials and workmanship for a period of twelve months from the date of purchase. Stanley Hydraulic Tools reserves the right to repair or replace only those parts which prove to have been defective at the time of purchase. This warranty becomes void if maximum flow and pressure ratings are exceeded.

All Stanley Hydraulic Tools, parts, accessories and allied equipment are subject to design improvements, specification and price changes at any time without notice and with no obligation to units already sold. Weights, dimensions and operating specifications listed herein are subject to change without notice. Where specifications are critical to your applications, please consult Stanley Hydraulic Tools.

STANLEY[®]

Distributed by
McCann Equipment Ltd.

Montreal: 10255 Cote De Liesse, Dorval, QC H9P 1A3
Tel.: 1-800-663-6344
Fax: (514) 636-0365

Toronto: 2178 Torquay Mews, Mississauga, ON L5N 2M6
Tel.: 1-800-287-5714
Fax: (905) 542-1335