



Trash Pump

TP08



SPECIFICATIONS

| ITEM | U.S.A. | METRIC |
|-----------------------|--|-----------|
| Capacity | 800 gpm | 3,028 lpm |
| Weight | 59 lbs | 26.7 kg |
| Height (over handle) | 16.5 in. | 42 cm |
| Length | 19 in. | 48.3 cm |
| Width | 15 in. | 38.1 cm |
| Pressure | 2,000 psi | 140 bar |
| Flow Range | 7-9 gpm | 26-34 lpm |
| Maximum Flow | 9 gpm | 34 lpm |
| Porting | #10 SAE (Press.) #12 SAE (Ret) | |
| Connect Size and Type | 1/2 in. Male Pipe (Press.) 3/4 in. Male Pipe (Ret) | |
| Discharge Diameter | 4 in. Camlock | |
| Inlet Diameter | 4 in. | 100 mm |

The Stanley TP08 Trash Pump is a light-weight, heavy duty pump capable of pumping high volumes of water, sand slurries, gravel, sludge and solids up to 3 in./75 mm in diameter. The TP08 is submersible, self priming and can run dry without damage to the motor, bearings or impeller.

The TP08 has been designed to get the most from an HTMA Type II hydraulic circuit. Using only 9 gpm/34 lpm of hydraulic flow, the TP08 will pump over 800 gpm/3,028 lpm at a 10 ft/2.54 m head. The free-flow impeller and 4 in./100 mm inlet and outlet combine to make the TP08 one of the most efficient pumps in the business.

Weighing only 59 lbs/27 kg and with its convenient handle, the TP08 can easily be

handled by one operator. The TP08 and the Stanley HP1 Compact Power Unit make a powerful, portable team for high volume de-watering and trash pump applications.

The heavy-duty construction of the TP08 features a fabricated, all steel volute and abrasion resistant cast iron impeller. The volute uses replaceable UHMW polyethylene wear plates to reduce wear and extend pump life. The heavy-duty Stanley HYREVZ™ hydraulic motor is self-lubricating.

Routine maintenance for the TP08 is easy. The top cover is attached to the volute with six wing nuts so cleaning and inspection can be accomplished in just a few minutes.



Distributed by
McCann Equipment Ltd.

Montreal: 10255 Cote De Liesse, Dorval, QC H9P 1A3
Tel.: 1-800-663-6344
Fax: (514) 636-0365


Toronto: 2178 Torquay Mews, Mississauga, ON L5N 2M6
Tel.: 1-800-287-5714
Fax: (905) 542-1335

ORDERING INFORMATION


| ORDER NO. | DESCRIPTION |
|-----------|------------------------------------|
| TP08013 | 4 in. Trash Pump, 800 gpm/3028 lpm |

WARRANTY

Stanley Hydraulic Tools and their associated parts are warranted against defects in materials and workmanship for a period of twelve months from the date of purchase. Stanley Hydraulic Tools reserves the right to repair or replace only those parts which prove to have been defective at the time of purchase. This warranty becomes void if maximum flow and pressure ratings are exceeded.

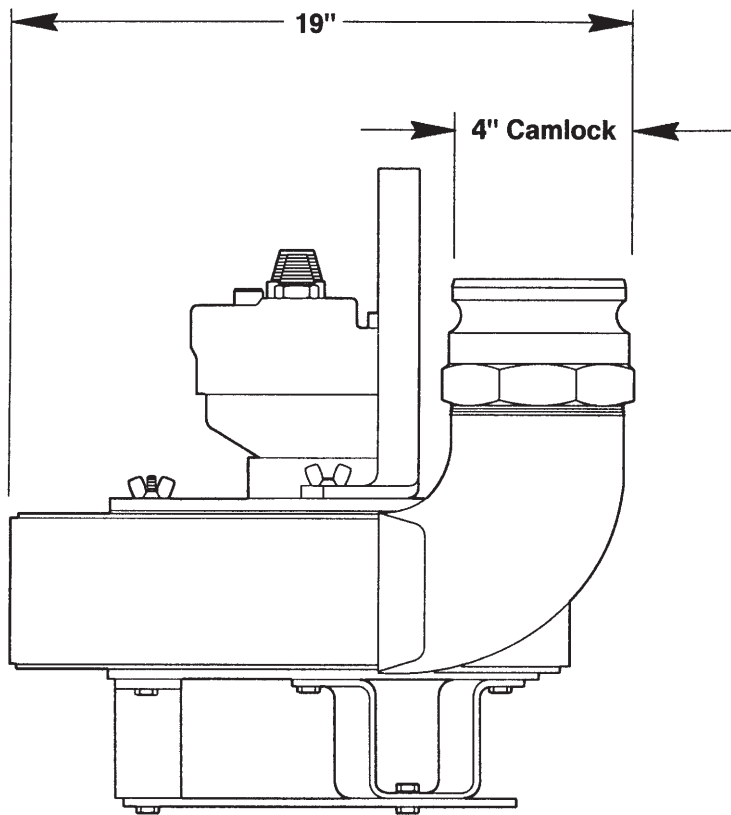

TP08 PERFORMANCE CHART

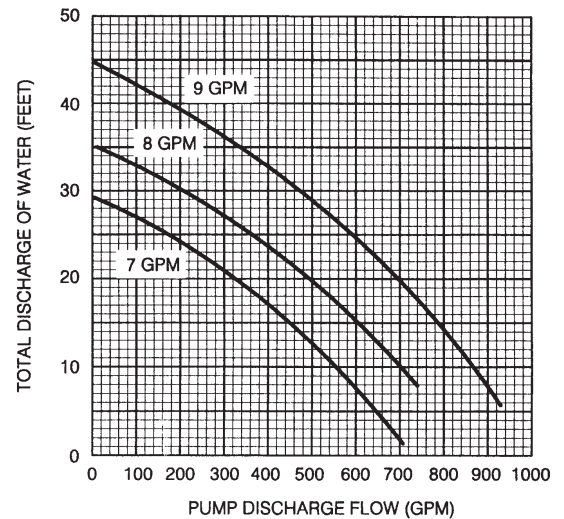

All Stanley Hydraulic Tools, Parts, Accessories and allied equipment are subject to design improvements, specification and price changes at any time without notice and with no obligation to units already sold. Weights, dimensions and operating specifications listed herein are subject to change without notice. Where specifications are critical to your application, please consult Stanley Hydraulic Tools.

STANLEY

Distributed by
McCann Equipment Ltd.

Montreal: 10255 Cote De Liesse, Dorval, QC H9P 1A3
Tel.: 1-800-663-6344
Fax: (514) 636-0365

Toronto: 2178 Torquay Mews, Mississauga, ON L5N 2M6
Tel.: 1-800-287-5714
Fax: (905) 542-1335